

Assembly of the toilet seat

10. Insert two expanded rubber pipe (K) onto the holes of pan, put adjustable plate (I) and metal washer (J) onto plastic plate (L).
11. Adjust small plate (I) onto proper position, tighten the screw (H).
12. Push and insert the seat cover (G) horizontally till sound of ticking.

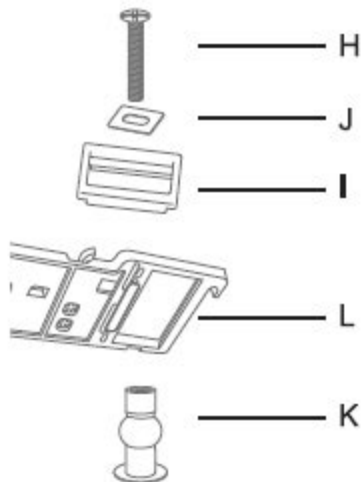


Fig. 5

Check out our full range of Bathroom Suites

Bathroom Suites By Range

Cloakroom Suites

Toilets

Bathroom Sinks / Wash Basins

Bidets

Baths

Wide variety of toilets

Close Coupled Toilets

Wall Hung Toilets

Back To Wall Toilets

Furniture unit toilets

Huge Selection of Baths

Acrylic Baths

Steel Baths

Shower baths

Freestanding baths

Small baths

Corner baths

Whirlpool baths

Don't forget the important bathroom suite extras

Bath panels

Toilet seats

plumbworld
Big brands, small prices.